

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

## **IMAGES ARE BEST AVAILABLE COPY.**

As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets

(11) Publication number:

**0 321 561**  
**A1**

(12)

## EUROPEAN PATENT APPLICATION

published in accordance with Art. 158(3) EPC

(21) Application number: **87903905.5**

(51) Int. Cl.: **D 21 G 1/02**

(22) Date of filing: **10.06.87**

Data of the international application taken as a basis:

(86) International application number:  
**PCT/JP 87/00369**

(87) International publication number:  
**WO 88/09846 (15.12.88 88/27)**

(43) Date of publication of application: **28.06.89**  
**Bulletin 89/26**

(71) Applicant: **KINYOSHA CO. LTD., 3-24, Osaki 1-chome, Shinagawa-ku Tokyo141 (JP)**

(72) Inventor: **SAITO, Yuji, 27-2, Buzo 2-chome Urawa-shi, Saitama-ken 336 (JP)**  
Inventor: **YAMADA, Kazuo, 1900, Shimonumabe Nakahara-ku Kawasaki-shi, Kanagawa-ken 211 (JP)**  
Inventor: **INOUE, Akiyoshi, Hikarinomachi 302 415-2, Kawakami-cho, Totsuka-ku Yokohama-shi Kanagawa-ken 244 (JP)**  
Inventor: **TAKAOKA, Yasuhiro, 505, 16-15, Saigo 1-chome Konan-ku, Yokohama-shi Kanagawa-ken 233 (JP)**

(84) Designated Contracting States: **DE FR GB SE**

(74) Representative: **Kinzebach, Werner, Dr. et al, Patentanwälte Reitzstötter, Kinzebach und Partner Sternwartstrasse 4 Postfach 86 06 49, D-8000 München 86 (DE)**

(54) **RESINOUS CALENDER ROLL.**

(57) A calender roll made of a resin of the present invention is characterized in that the shelf elastic modulus of the resin and the range of the Shore D hardness are defined to specific values. It requires no break-in operation, has excellent heat and pressure resistance, reduces heat generation during rotation and can prevent scatter of the resin when the roll is broken. This calender roll can apply to a paper making calender, or the like.

**EP 0 321 561 A1**

- 1 -

## S P E C I F I C A T I O N

A resin calender roll

## [Technical Field]

The present invention relates to a resin calender roll, such as a papermaker's calender roll, a textile  
5 calender roll, a magnetic tape calender roll, and the like.

## [Prior Art]

Conventionally, a so-called cotton roll, paper  
roll, woolen roll, and the like of cotton wool, cotton,  
10 absorbent cotton, paper, wool, and the like have been used as papermaker's calender rolls.

Rolls utilizing these materials have a nonuniform hardness since they are aggregates of fibers. Therefore, when actual use, the hardness of the roll surface  
15 is made uniform to some extent by pre-operation. However, the operation for making the hardness of the surface uniform takes a considerable length of time. In these rolls using the fibers, internal heat generation during operation is large, and the interior of the roll  
20 is burnt and cannot be used any longer if the roll is operated at high rotational speed and pressure. If a problem such as web breakage occurs, paper sheets being treated become wrinkled, and are calendered overlying each other. If this happens, since the roll has poor  
25 recovery property, a paper trace remains on the roll

surface, which damages the following paper sheets. Similarly, when a large-width sheet is treated after a small-width sheet has been treated, the edge portion of the small-width sheet directly influences the large-width sheet. For this reason, a plurality of auxiliary rolls are provided, the rolls being exchanged each time the sheet width is changed. If the surface of a roll has been damaged by overlying sheets, the roll is then re-ground.

10 A roll using a so-called thermoplastic monomer casting nylon is also used. This roll generates a large amount of heat and reaches a high temperature upon polymerization. Also, this type of roll has a large amount of molding shrinkage. Therefore, the roll must be prepared by fitting a hollow resin pipe on the surface of a metal core or mandrel directly or through an underlying layer such as urethane rubber. In the case of this roll, the metal core or the underlying layer is not adhered to the resin layer. For this reason, the resin layer is broken when this roll does not withstand high-speed rotation at high pressure. The fragments of the layer scatter and damage equipment, and may cause an accident involving personnel.

[Disclosure of the Invention]

25 A calender resin roll according to the present invention is characterized in that the temperature of a characteristic inflection point of a storage modulus ( $E'$ ) of resin forming a surface layer adhering on a metal core is higher than the temperature corresponding to the sum of the resin temperature during operation and 10°C, and is lower than the temperature corresponding to the sum of the resin temperature during operation and 80°C, and the Shore D hardness of the resin falls within the range of 75 to 97.

35 The resin forming the surface layer can be any material which is in a liquid phase during molding, in order to facilitate the molding of a large roll, so that

it can be injected in a mold and can be molded into a roll, and which can satisfy the requirements of the temperature of the characteristic inflection point of the storage modulus ( $E'$ ) and the Shore D hardness. More preferably, the resin should generate a small amount of heat upon crosslinking reaction, so that it can be easily formed on the adhesive layer, which is formed on the metal core. Examples of the resin include, a polyurethane resin, a polyisocyanurate resin, a crosslinked polyesteramide resin, or an epoxy resin.

The reason why the temperature range of the characteristic inflection point of the storage modulus ( $E'$ ) is determined to be higher than the temperature corresponding to the sum of the resin temperature during operation and  $10^{\circ}\text{C}$  and to be lower than the temperature corresponding to the sum of the resin temperature and  $80^{\circ}\text{C}$  is as follows:

In the case of the former temperature, it can be theoretically set to be higher than the resin temperature during operation. However, in practice, if the resin temperature exceeds the temperature of the characteristic inflection point of the storage modulus ( $E'$ ) of resin due to the kind of equipment in which a calender roll is used and also work conditions, the resin is immediately softened. In order to prevent this phenomenon, the  $10^{\circ}\text{C}$  range is added to the temperature which the resin layer has during operation. In the case of the latter temperature, if the temperature exceeds the sum of the resin temperature and  $80^{\circ}\text{C}$  and if the conditions under which the calender roll is operating are severe, --e.g., at high pressure and at high rotational speed-- local heat generation occurs and the heated portion expands. Further, if a load is concentrated on the heated portion, abnormal heat generation occurs. However, within such a high temperature range, the resin is not softened but is instead expanded, with the result that a large crack may form in the resin layer (surface

layer), due to the local load concentration, and finally, the resin layer eventually break up and scatter. In order to prevent this phenomenon, the latter temperature range is set.

5        It should be noted that the characteristic inflection point of the storage modulus ( $E'$ ) of resin is the point at which the storage modulus greatly decreases while the resin is transisting from a glass state to a rubber state. This point is measured while changing  
10       a temperature at a constant frequency by using a viscospectrometer. The constant frequency normally falls within the range of 10 to 50 Hz. The rate of increase in temperature is normally set to be 2°C/min.

      More specifically, in the calender roll of the  
15       present invention, even if abnormal heat generation occurs locally on the roll surface, due to overly severe operating conditions, the temperature of the characteristic inflection point of the storage modulus ( $E'$ ) still falls within the predetermined range. Therefore,  
20       the heated portion softens at the beginning of thermal expansion, with the result that load concentration can no longer occur. If the heated portion is broken, only hair cracking occurs on the surface of the resin layer and the layer does not break up and scatter. For this  
25       reason, the resin layer is broken by local heat generation, the layer will not scatter, and a personnel accident can be prevented.

      The reason why the Shore D hardness of the resin is set to fall within the range of 75 to 97, and the hardness set to be 75 or more is as follows:  
30      

      A calender roll normally operates at high pressure and at high rotational speed. If the hardness is lower than 75, a deformation degree of the resin is increased due to an operation pressure. As a result, the interior  
35       of the resin is heated and broken. Normally, since a hard resin has a low elongation at break, if it is used at high pressure, the elongation at break of the

resin itself can't follow its deformation before heat generation, that it is broken.

The reason why the hardness is set to be 97 or less is to eliminate the following problem:

5        When a resin roll is used in a normal application, it is ground with a crown so as to uniformly contact a metal roll or an object to be treated. If the grinding precision is poor, a portion of the roll may receive the entire load during the roll operation. In this case,  
10       if the hardness is lower than Shore D 97, deformation occurs on whole region of the roll, as a result, there is no problem. However, if the hardness is high (exceeding 97), deformation degree is small, and a portion of the roll receives the entire load. This causes  
15       an overload state for the roll, and the resin layer is broken.

The operation of the calender resin roll of the present invention will now be described.

20       In general, if a roll coated with a hard resin is operated at high rotational speed in a high load state, local heat generation occurs. If the temperature of a metal roll contacting the resin roll is high, this phenomenon is noticeable.

25       In order to prevent this, in super calendering, crown-controlled rolls (swimming rolls) are used as upper and lower metal rolls, so that a uniform pressure is applied to the entire surface of the roll.

30       In on-machine calendering, a resin is coated on a crown-controlled roll (zone-controlled roll), the surface temperature of the roll is detected by a sensor, and if local heat generation occurs, a pressure at the corresponding portion is decreased, and the roll is used with another crown.

35       However, local heat generation occurs despite of such efforts.

If the local heat generation occurs, the corresponding portion of the resin is thermally expanded and

projects. A concentrated load acts on the projection, and this portion is further heated. Thus, a temperature of this portion is increased by repetition of this phenomenon.

5           This will be explained with reference to the drawing.

          The drawing shows the relationship between the storage modulus ( $E'$ ) of resin and a resin temperature  $T$ . In general, a thermosetting resin has a characteristic  
10       inflection point  $T_a$  ( $T_a-1$ ,  $T_a-2$ ,  $T_a-3$ , see Fig. 1). If the temperature exceeds this inflection point, an storage modulus is immediately decreased.

          Assume that a resin roll is operated at a resin temperature of  $80^\circ\text{C}$ . In the case of composition A, if  
15       local heat generation occurs and if the temperature of the corresponding portion exceeds  $100^\circ\text{C}$ , the corresponding portion of the resin is softened and no longer receives a load. Thus, a load acts on the other portion of the roll surface which is free from the local heat  
20       generation. For this reason, an increase in temperature due to the local heat generation is stopped at a given temperature, and this does not result in roll breakage.

          Since the resin has a small elongation at break, when a force is applied to the roll or a rotation speed  
25       of the roll or the temperature of the roll is increased in this state, only hair cracking occurs at the locally heated portion without the resin being scattered.

          In the case of composition B, it's inflection point  $T_a-2$  is present at  $160^\circ\text{C}$ . So, the following things can  
30       be said in comparison of composition A and B: Due to the fact that composition B has a larger thermal expansion at its locally heated portion than the locally heated portion of composition A, the depth of a hair crack in composition B is larger than that of composition A and  
35       extends so as to reach an adhesive layer. In this invention, the resin would not scatter since the resin is adhered on a metal core.



In the case of composition C, inflection point Ta-3 is 200°C, and hence, a temperature of the locally heated portion exceeds 200°C. For this reason, the resin has an even larger thermal expansion than compositions A and B, and the depth of a crack is also larger. Therefore, the resin is scattered. In this case, the resin may also suffer thermal decomposition because the resin temperature exceeds 200°C.

In the case of composition D, no inflection point is present previous to 250°C. Therefore, the extent to which the resin is scattered is greater than in composition C.

The conditions under which a resin does not scatter have been determined from a large number of tests.

As a result, it was concluded that characteristic inflection point Ta of the resin must be higher than a resin temperature during practical operation within the range of 10°C to 80°C.

Note that the example of composition A corresponds to Example 1, and the example of composition B corresponds to Examples 3 and 4. Example 2 uses an intermediate composition of these examples. Examples of compositions C and D correspond to Comparative Examples 1 and 2.

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

The drawing is a graph showing the relationship between a storage modulus of a resin and a resin temperature during operation.

[Best Mode of Carrying Out the Invention]

The present invention will now be described by way of its examples.

Example 1.

A casting mold was prepared through which an iron core, the surface of which was subjected to a blast treatment and was applied with an adhesive (trade name:

Conap 1146, available from Conap Corp, a phenol-based adhesive), was inserted. 100 parts by weight of Sunnix HD402 subjected to dehydration at a temperature of 120°C were charged into a mixing machine, and 100 parts by weight of Millionate MT and 200 parts by weight of dried Crystallite A-1 (available from K.K. Tatsumori, a quartz powder) were added thereto. The mixture was stirred at a reduced pressure for 5 minutes. The resultant mixture was injected into the casting mold, and was heated at 90°C for 5 hours to be cured. The resultant cured product was taken out from the mold and was subjected to conventional surface grinding. Thus, a calender roll of Example 1 having a hard polyurethane resin layer formed on the iron core was obtained.

The values of the Shore D hardness, the tensile strength, and the elongation at break of the hard polyurethane resin layer were as shown in Table 1 below. The Sunnix HD402 was polyether polyol available from Sanyo Chemical Industries, LTD, and had a hydroxyl value of 394.

The Millionate MT was diphenylmethane diisocyanate available from Nippon Polyurethane Industry Co., LTD., and had an isocyanate (NCO) content of 33.6%.  
Example 2

A casting mold was prepared through which an iron core, the surface of which was subjected to a blast treatment and applied with an adhesive, was inserted. 75 parts by weight of 1,3-bis(2-oxazonyl-2)benzene, 25 parts by weight of adipic acid, and 1 part by weight of triphenyl phosphite were mixed in a solution bath, and were perfectly dissolved at 130°C. The mixture was stirred at reduced pressure. The resultant mixture was injected into the preheated casting mold, and was cured at 200°C for 30 minutes, and was then cooled. The resultant cured product was taken out from the mold. Thereafter, the product was subjected to conventional surface grinding, thus obtaining a calender roll of

Example 2. The values of Shore D hardness, the tensile strength, and the elongation at break of this calender roll were also as shown in Table 1 below.


Example 3

5           A casting mold as in Example 2 was prepared.  
Then, 66.1 parts by weight of 4,4'-methylene  
bis(2-chloroaniline) was heated and melted at 120°C.  
The molten 4,4'-methylene bis(2-chloroaniline) and 100  
10 parts by weight of Coronate EH (trade name: available  
from Nippon Polyurethane Industries Co., LTD.), which  
is preheated at 50°C were mixed and stirred under  
a pressure less than 1 atom, thereby forming a mixture.  
This mixture was pored into the mold, then heated at  
120°C for 4 hours, and thereby cured. The resultant  
15 cured product was taken out from the mold, and was sub-  
jected to conventional surface grinding to obtain a  
calender roll of Example 3. The values of the Shore D  
hardness, the tensile strength, and the elongation at  
break of this calender roll were also as shown in  
20 Table 1 below.

Example 4


          A casting mold through which an iron core subjected  
to a surface blast treatment was inserted was prepared.  
100 parts by weight of Sumiepoxy ELM-434 (trade name:  
25 available from Sumitomo Chemical Co., LTD.) preheated to  
90°C and 80 parts by weight of HN5500E (trade name:  
available from Hitachi Chemical Co., Ltd.) preheated to  
90°C were stirred at reduced pressure. The mixture was  
injected in the mold preheated to 90°C and was heated  
30 and cured under the conditions of 90°C, 2 hours and  
120°C, 2 hours and 150°C, 4 hours. The resultant cured  
product was taken out from the mold, and was subjected  
to conventional surface grinding, thus obtaining a roll  
of Example 4. Note that the general formulas of ELM-434  
35 and HN-2200 are as follows:

(i) ELM-434

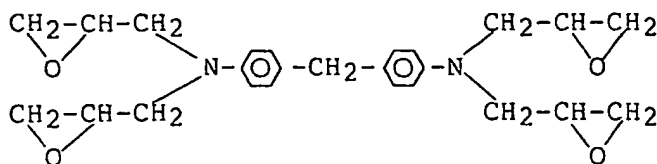

5

(ii) HN-2200



10

Calender rolls of Comparative Examples 1 to 3 which were prepared for comparison with Examples 1 to 4 will now be explained.

15

## Comparative Example 1

A casting mold as in Example 1 was prepared. 100 parts by weight of Millionate MT and 40 parts by weight of PPG DIOL 2000 (trade name; available from Mitsui Toatsu Chemicals, Inc.) were melted and mixed at 60°C. 0.5 parts by weight of N,N',N''-tris(dimethylaminopropyl)hexahydro-s-triazine were added to the mixture, and the resultant mixture was stirred at reduced pressure. The mixture was injected into the mold, and was heated at 140°C for 2 hours and was cured at 180°C for 4 hours. The resultant cured product was taken out from the mold, and was subjected to conventional surface grinding, thereby obtaining a calender roll of Comparative

20

## 30 Comparative Example 2

A casting mold as in Example 1 was prepared. Then, 100 parts by weight of Millionate MT and 40 parts by weight of PPG DIOR 2000 were melted and mixed at 60°C. 100 parts by weight of dried Crystallite A-1 were added to the mixture. 0.5 parts by weight of N,N',N''-tris(dimethylaminopropyl)hexahydro-s-triazine were added to the mixture. The mixture was heated at 140°C for

35

2 hours and was cured at 180°C for 4 hours. The resultant cured product was taken out from the mold, and was subjected to conventional surface grinding, thereby obtaining a calender roll of Comparative Example 2.

5 Comparative Example 3

A casting mold as in Example 1 was prepared. 90 parts by weight of Polycure IC-701 (trade name: available from Sanyo Chemical Industries, LTD; an isocyanate component) and 10 parts by weight of Polycure  
10 SU-101 (trade name: available from Sanyo Chemical Industries, LTD; a polyol component) in which 0.5 parts by weight of catalyst A (trade name: available from Sanyo Chemical Industries, LTD; an isocyanate trimerized catalyst) were pre-mixed were heated and mixed at 50°C  
15 and at reduced pressure. The mixture was injected into the mold, and was heated and cured at 150°C for 5 hours. The resultant cured product was taken out from the mold and was subjected to conventional surface grinding, thereby obtaining a calender roll of Comparative  
20 Example 3.

The values of Shore D hardness, the tensile strength, and the elongation at break of the calender rolls of Comparative Examples 1 to 3 were as shown in Table 1 below.

Table 1

	Exam- ple 1	Exam- ple 2	Exam- ple 3	Exam- ple 4	Compara- tive Example 1	Compara- tive Example 2	Compara- tive Example 3
Hardness (Shore D)	89	92	86	90	85	91	80
Tensile Strength (kgf/cm <sup>2</sup> )	800	1340	418	470	623	—	530
Elongation at Break	8	4	18	2	9	—	15

The roll breaking test, i.e., the heating, compressing, and rotating test, was conducted for the calender rolls of Examples 1 to 4 and Comparative Examples 1 to 3. The test results shown in Table 2 were obtained.

5       The roll breaking test was conducted using a combination of 300 mm (diameter) × 300 mm (length) metal rolls whose surface temperature could be controlled, and the respective calender rolls. The dimensions of each calender roll were 160 mm (diameter) × 140 mm (diameter)  
10       × 100 mm (length). As shown in Table 2, the test was performed until the calender rolls were broken while changing the temperature, pressure, and rotational speed, and the broken states were examined.

15       As can be seen from Table 2, in the calender rolls of Examples 1 to 4, the resin layers were only cracked and scattering caused by breakage was not observed at all.

20       In contrast to this, it was found that in the calender rolls of Comparative Examples 1 to 3, the resin layers were completely broken and scattered. It was found that in the rolls of Examples 1 to 4, the inflection points fell within the range of 90 to 160°C. However, it was confirmed that in the rolls of Comparative Examples 1 to 3, the inflection points were high,  
25       i.e., exceeded 200°C.

Table 2

	Exam- ple 1	Exam- ple 2	Exam- ple 3	Exam- ple 4	Compara- tive Example 1	Compara- tive Example 2	Compara- tive Example 3
Rotation- al Speed (r.p.m.)	800	752	800	600	400	600	800
Line Pressure (kgf/cm)	200	300	300	200	180	300	200
Tempera- ture of Metal Roll (°C)	70	120	140	120	120	40	140
Tempera- ture of resin sur- face (°C)	60	90	120	110	100	30	110

(to be continued)



	Exam- ple 1	Exam- ple 2	Exam- ple 3	Exam- ple 4	Compara- tive Example 1	Compara- tive Example 2	Compara- tive Example 3
Tempera- ture of Resin Surface Locally Heated Portion (°C)	115	130	180	185	200 or higher	200 or higher	200 or higher
State of Resin	crack- ed	crack- ed	crack- ed	crack- ed	scatter- ed	scatter- ed	scatter- ed
Inflec- tion Point (°C)	90	110	160	165	250 or higher	250 or higher	200

**0 321 561**


- 16 -

[Industrial Applicability]

The present invention can be applied not only to a  
papermaker's calender roll but also to various other  
resin calender rolls such as a magnetic tape calender  
5 roll.

## Claims:

1. A resin calender roll characterized in that a temperature of a characteristic inflection point of a storage modulus ( $E'$ ) of a resin forming a surface layer adhered to the surface of a metal core is higher than a temperature corresponding to a sum of a resin temperature during operation and  $10^{\circ}\text{C}$ , and is lower than a temperature corresponding to a sum of the resin temperature during operation and  $80^{\circ}\text{C}$ , and a Shore D hardness of the resin falls within the range of 75 to 97.
2. A calender resin roll according to claim 1, characterized in that the resin forming said surface layer is composed of a thermosetting resin.
3. A calender resin roll according to claim 1, characterized in that the resin forming said surface layer is composed of a polyurethane resin.
4. A calender resin roll according to claim 1, characterized in that the resin forming said surface layer is composed of a polyisocyanurate resin.
5. A calender resin roll according to claim 1, characterized in that the resin forming said surface layer is composed of a crosslinked polyesteramide resin.
6. A calender resin roll according to claim 1, characterized in that the resin forming said surface layer is composed of an epoxy resin.

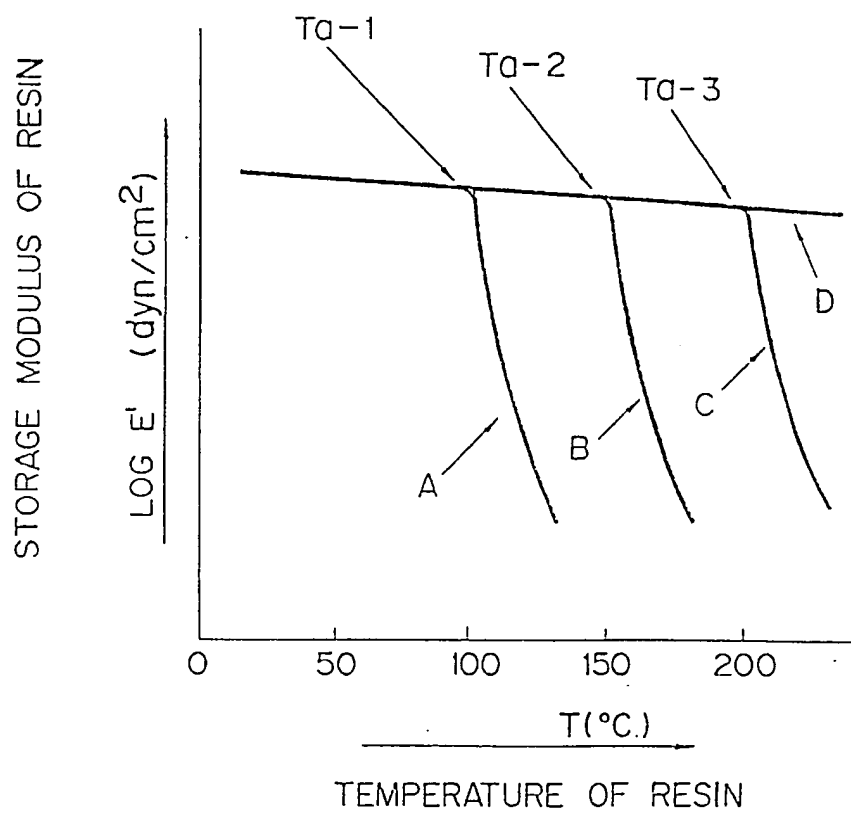

0321561

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/JP87/00369

I. CLASSIFICATION OF SUBJECT MATTER (If several classification symbols apply, indicate all) <sup>2</sup>

According to International Patent Classification (IPC) or to both National Classification and IPC

Int.Cl<sup>4</sup> D21G1/02

## II. FIELDS SEARCHED

Minimum Documentation Searched <sup>4</sup>Classification System <sup>1</sup>

Classification Symbols

IPC D21G1/00, D21G1/02

Documentation Searched other than Minimum Documentation  
to the extent that such documents are included in the fields searched <sup>6</sup>Jitsuyo Shinan Koho 1926 - 1987  
Kokai Jitsuyo Shinan Koho 1971 - 1987III. DOCUMENTS CONSIDERED TO BE RELEVANT <sup>14</sup>

Category <sup>8</sup>	Citation of Document, <sup>18</sup> with indication, where appropriate, of the relevant passages <sup>17</sup>	Relevant to Claim No. <sup>18</sup>
-----------------------	--	-------------------------------------

X	JP, A, 49-104614 (Sony Corporation) 3 October 1974 (03. 10. 74) & NL, A, 7401533 & DE, A1, 2405222 & FR, A1, 2216639 & IT, A, 1002826 & GB, A, 1437316 & CA, A1, 991914 & US, A, 4100326	1-3
Y	JP, A, 55-51895 (Esart Tusters) 15 April 1980 (15. 04. 80)	1-3

\* Special categories of cited documents: <sup>15</sup>

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"Z" document member of the same patent family

## IV. CERTIFICATION

Date of the Actual Completion of the International Search <sup>2</sup>

August 31, 1987 (31. 08. 87)

Date of Mailing of this International Search Report <sup>2</sup>

September 14, 1987 (14. 09. 87)

International Searching Authority <sup>1</sup>

Japanese Patent Office

Signature of Authorized Officer <sup>10</sup>